


NC5000A Series

18 GHz to 110 GHz

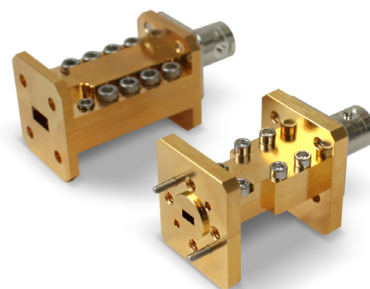

Precision Calibrated Millimeter-Wave Wave Guide AWGN Noise Sources

The NC5000A Series AWGN noise sources feature outstanding stability, switching speed, and ripple-free response over standard waveguide bands. The high stability of the NC5000A Series allows these units to be used in place of cumbersome gas tube noise sources.

Ripple in the output of noise sources has a direct effect on measurement accuracy, so NoiseCom has tailored the response of the NC5000 Series so that ripple is minimized throughout the specified frequency range.

The standard input bias connector is BNC female.

Applications

- Noise figure measurement
- Radiometers
- Built-in test equipment (BITE)
- Military applications
- Automotive Radar
- 802.11ad, 60GHz Wi-Fi
- 60 GHz WiGig
- Small Cell Wireless Backhaul
- Wireless HD

Specifications


Noise output rise and fall times	Less than 1 μ s
Noise output variation with temperature	Less than 0.01 dB/°C
Noise output variation with voltage	Less than 0.1 dB/1 % Δ V
Operating temperature	0 to +85°C
Input power	+28 VDC at 30 mA max



Options



NC5opt01	+15 VDC
NC5opt04	+28 VDC with regulation Stabilized noise output for $\pm$ 2V variation
NC5opt05	Output isolator This option is standard on NC5115A, NC5112A, NC5110A

Model	Frequency Range (GHz)	Noise Output ENR (dB)	Flatness (dB)	Typical VSWR	Mating Flange	Calibration Frequencies	Waveguide	I (max) (mA)
NC5142A	18 - 26.5	15.5	±1.5	1.3:1*	UG595/U	1 GHz steps	WR42	30
NC5242A	18 - 26.5	25.0	±1.0	1.3:1*	UG595/U	1 GHz steps	WR42	30
NC5442A	18 - 26.5	6.0	±1.0	1.3:1*	UG595/U	1 GHz steps	WR42	30
NC5128A	26.5 - 40	15.5	±1.5	1.3:1*	UG599/U	1 GHz steps	WR28	30
NC5228A	26.5 - 40	23.0	±2.5	1.3:1*	UG599/U	1 GHz steps	WR28	30
NC5428A	26.5 - 40	6.0	±1.0	1.3:1*	UG599/U	1 GHz steps	WR28	30
NC5122A	33 - 50	15.5	±1.5	1.3:1*	UG383/U	1 GHz steps	WR22	30
NC5222A	33 - 50	21	±1.5	1.3:1*	UG599/U	1 GHz steps	WR22	30
NC5115A	50 - 75	15.5 TYP	±3.0	1.6:1*	UG385/U	1 GHz steps	WR15	30
NC5112A	60 - 90	15 TYP	±6.0	1.6:1	UG387/U	1 GHz steps	WR12	30
NC5110A	75 - 110	13 TYP	±5.0	1.6:1	UG387/U	1 GHz steps	WR10	30

*Maximum VSWR with isolator - Option 5

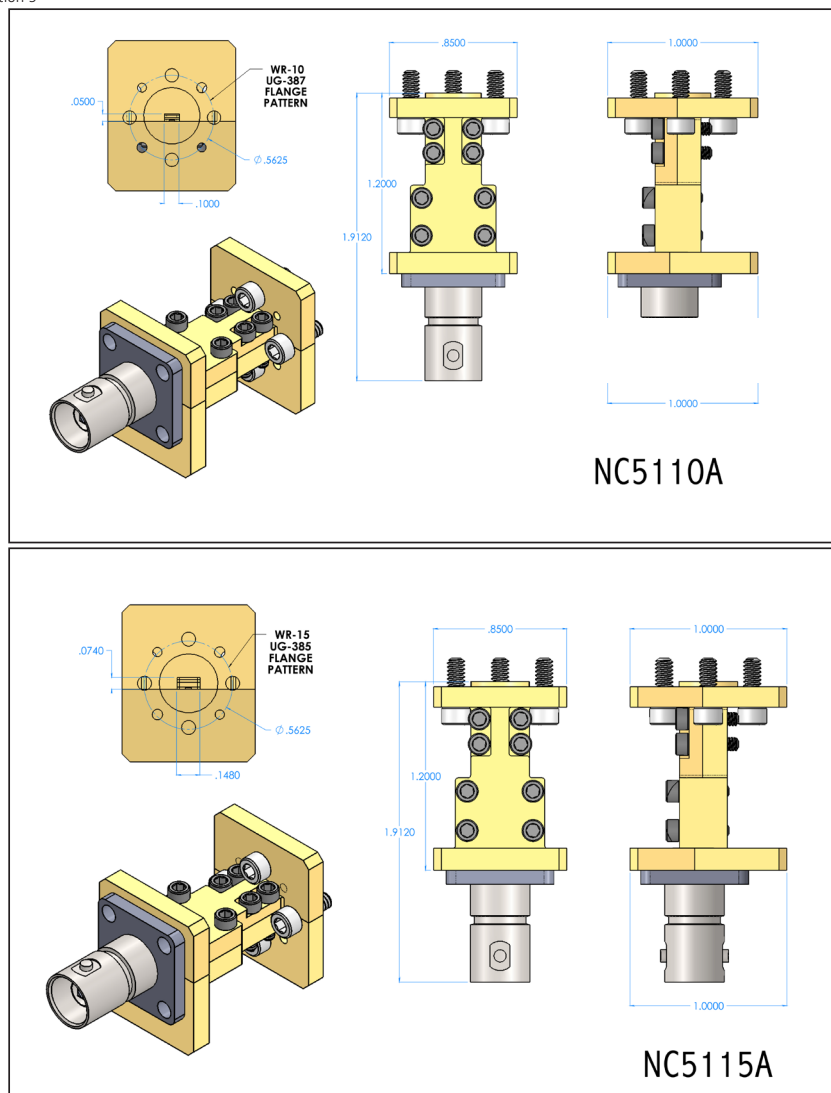

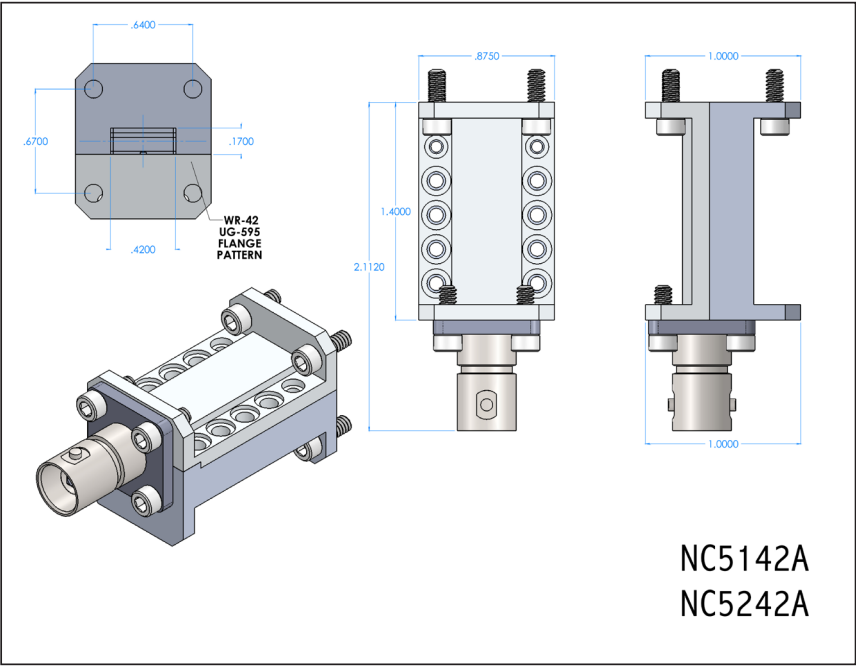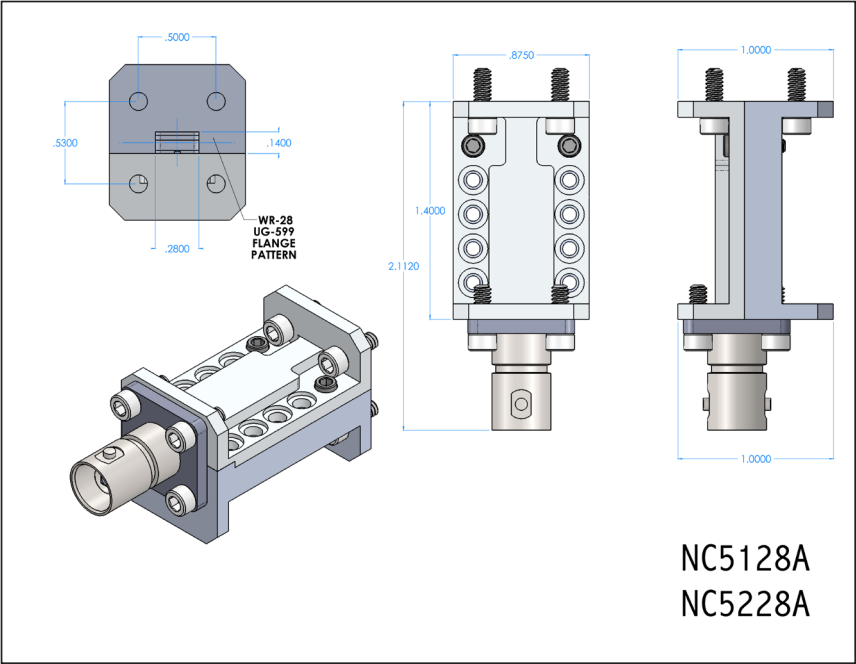

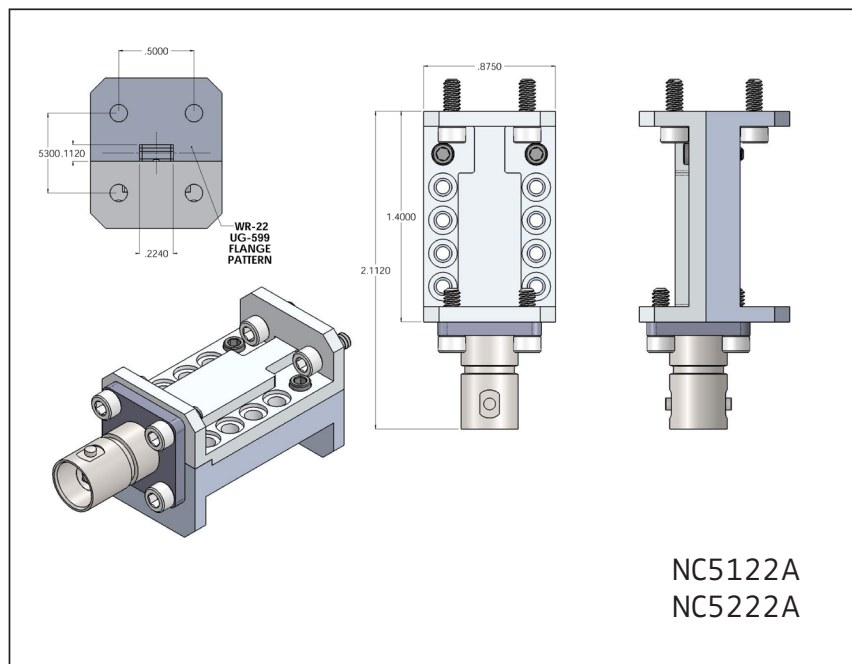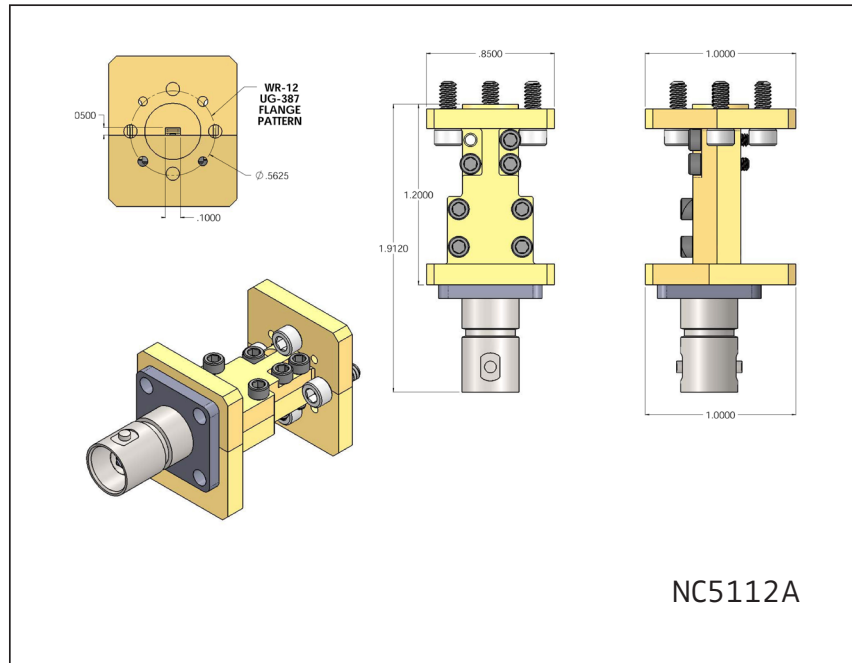

绿测科技有限公司

广州总部：广州市番禺区陈边村金欧大道83号江潮创意园A栋208室

深圳分公司：深圳市龙华区龙华街道 油松社区东环一路1号耀丰通工业园1-2栋2栋607

南宁分公司：广西自由贸易试验区南宁片区五象大道401号五象航洋城1号楼3519号

广州分公司：广州市南沙区凤凰大道89号中国铁建·凤凰广场B栋1201房

电话：020-2204 2442

传真：020-8067 2851

邮箱：Sales@greentest.com.cn

官网：www.greentest.com.cn



微信视频号



绿测科技订阅号



绿测工场服务号